



Replacement Sheet

1 / 8

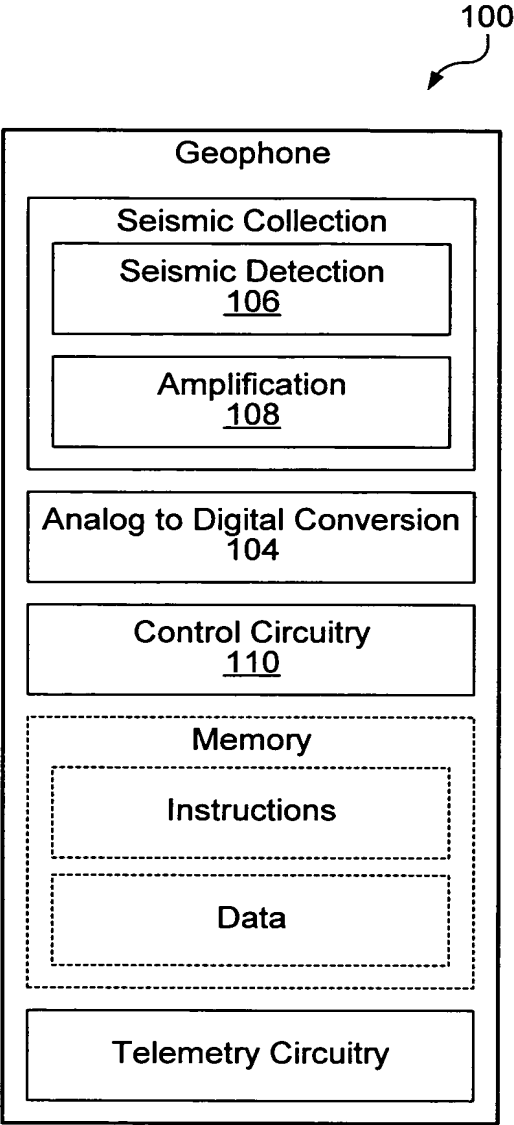


FIG. 1

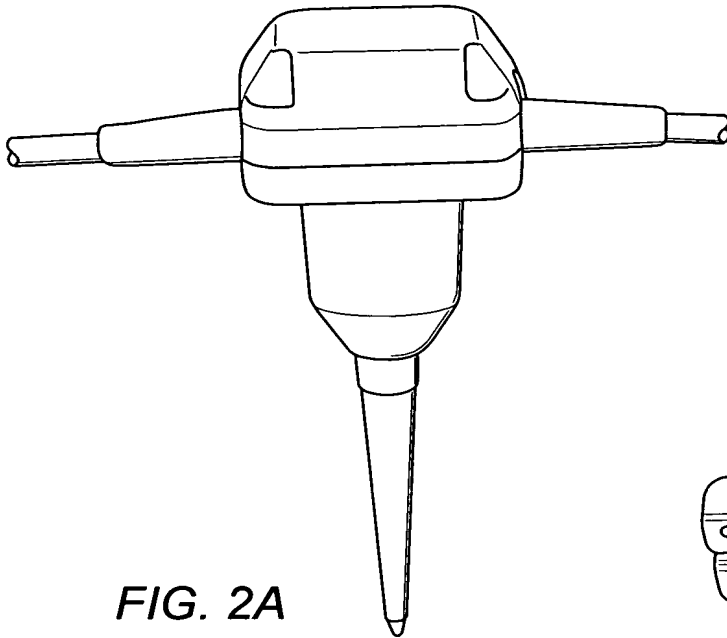


FIG. 2A

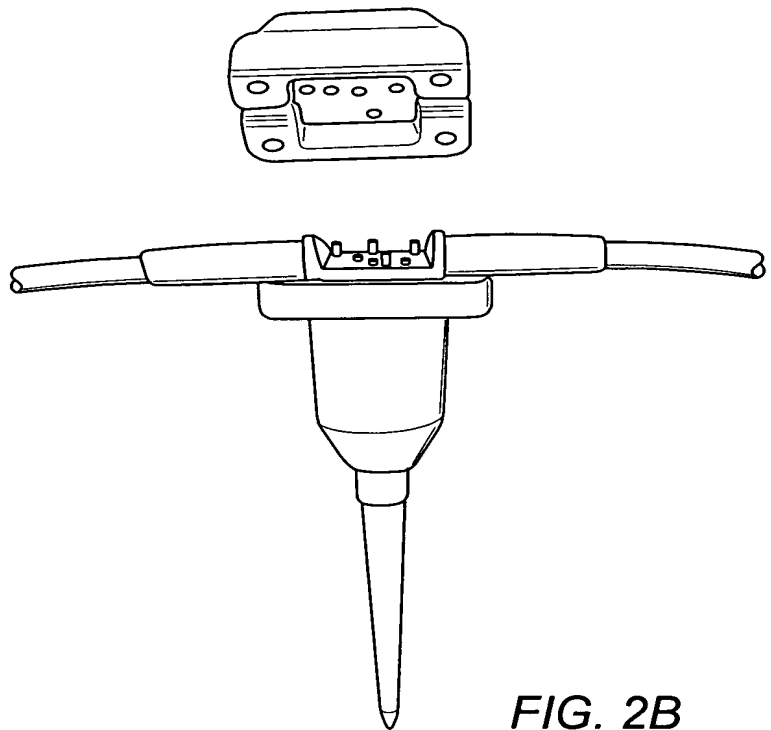


FIG. 2B


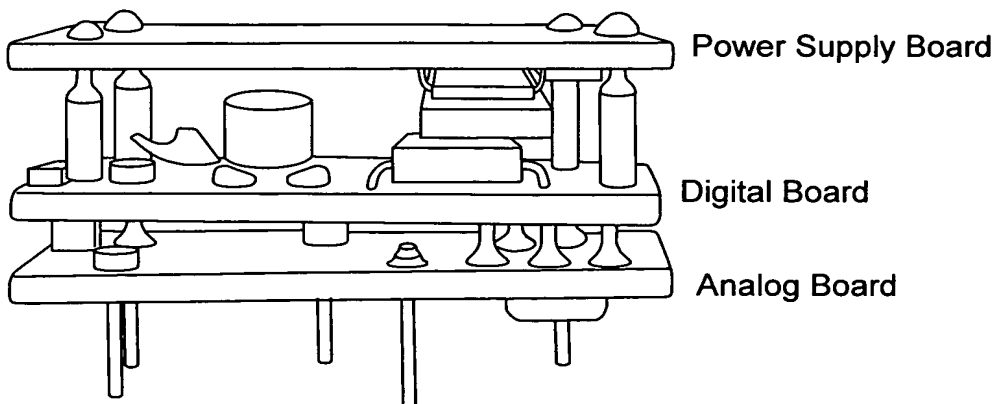


FIG. 3

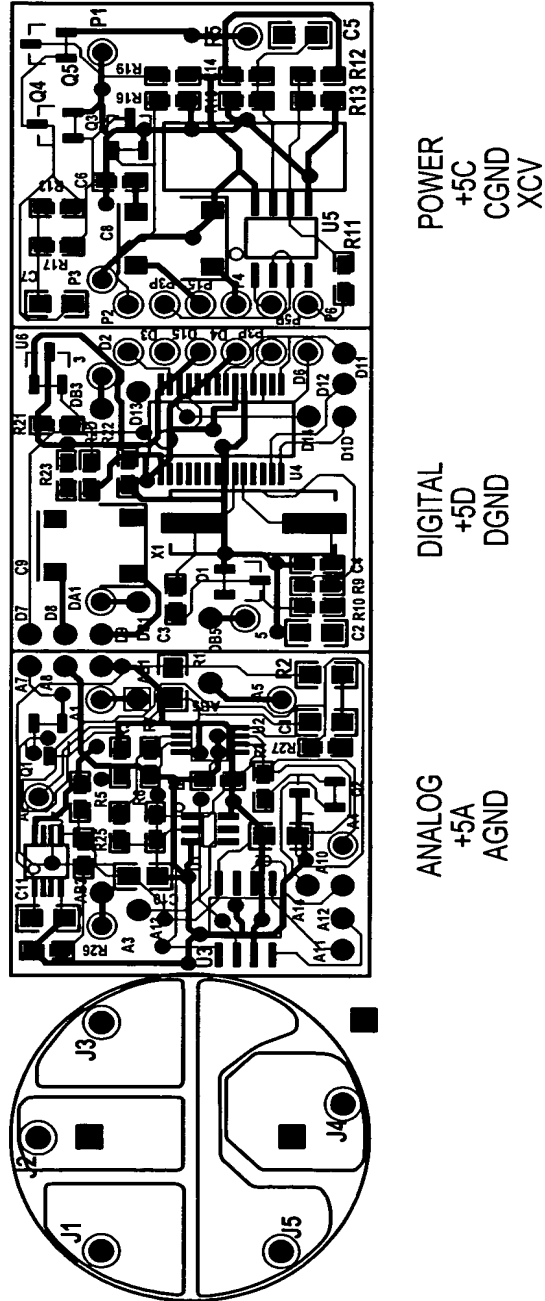

NOTES:

1. ANALOG AND DIGITAL FOLD CIRCUIT SIDES TOGETHER
2. POWER AND DIGITAL FOLD COMPONENT SIDES TOGETHER
3. WHEN FOLDED X1 COMPONENT ON DIGITAL BOARD SHOULD FOLD OVER A BLANK AREA ON POWER BOARD.
4. TP1... TP5 WILL HOLD PINS THAT PLUG INTO JUG BOARD.
5. SIGNALS SENSOR+ AND SENSOR- (TP1 & TP2):
  - A. MUST BE ROUTED TOGETHER.
  - B. MUST BE KEPT AWAY FROM OTHER SIGNALS.
  - C. SHOULD BE 'SHIELDED' WITH AN AGND LAND

**FIG.**

**FIG. 4**

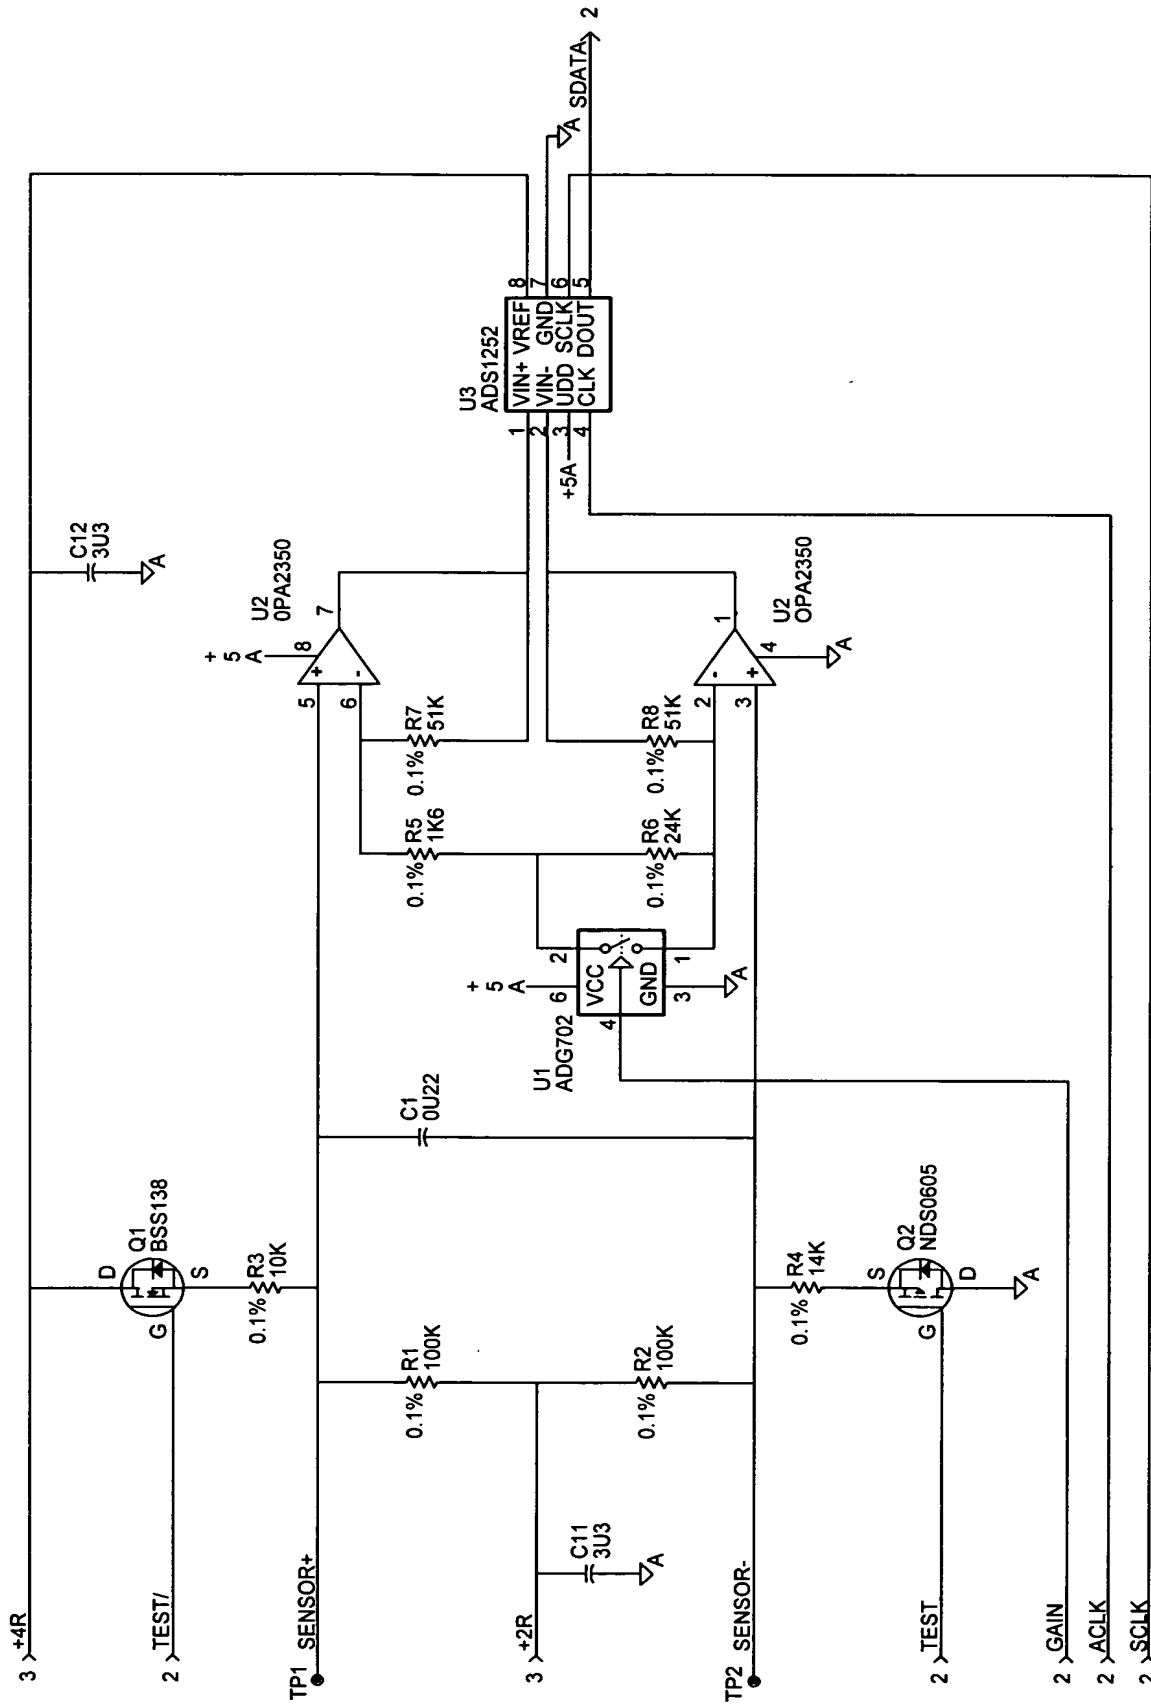


FIG. 5

ANALOG

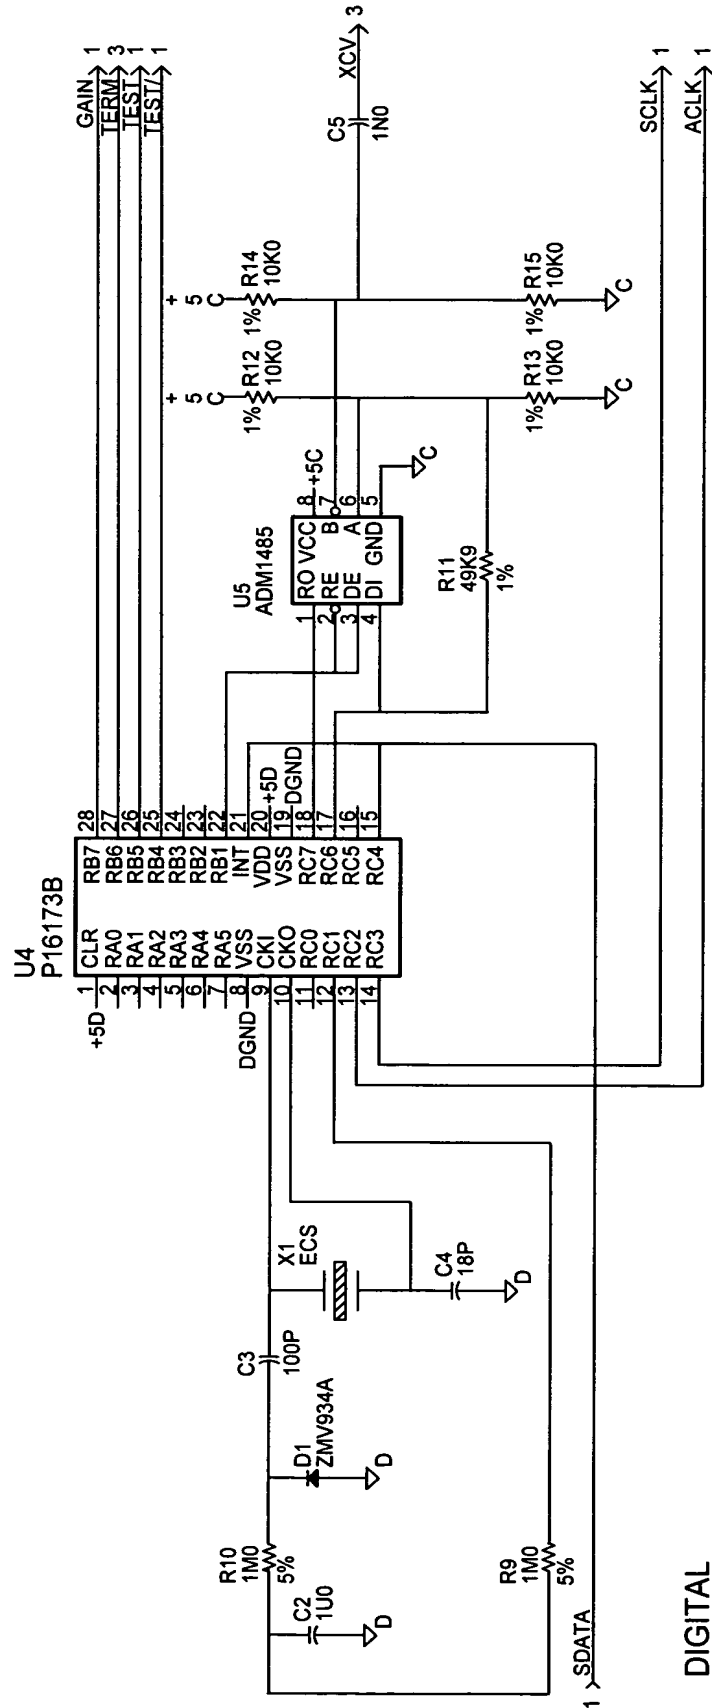


FIG. 6

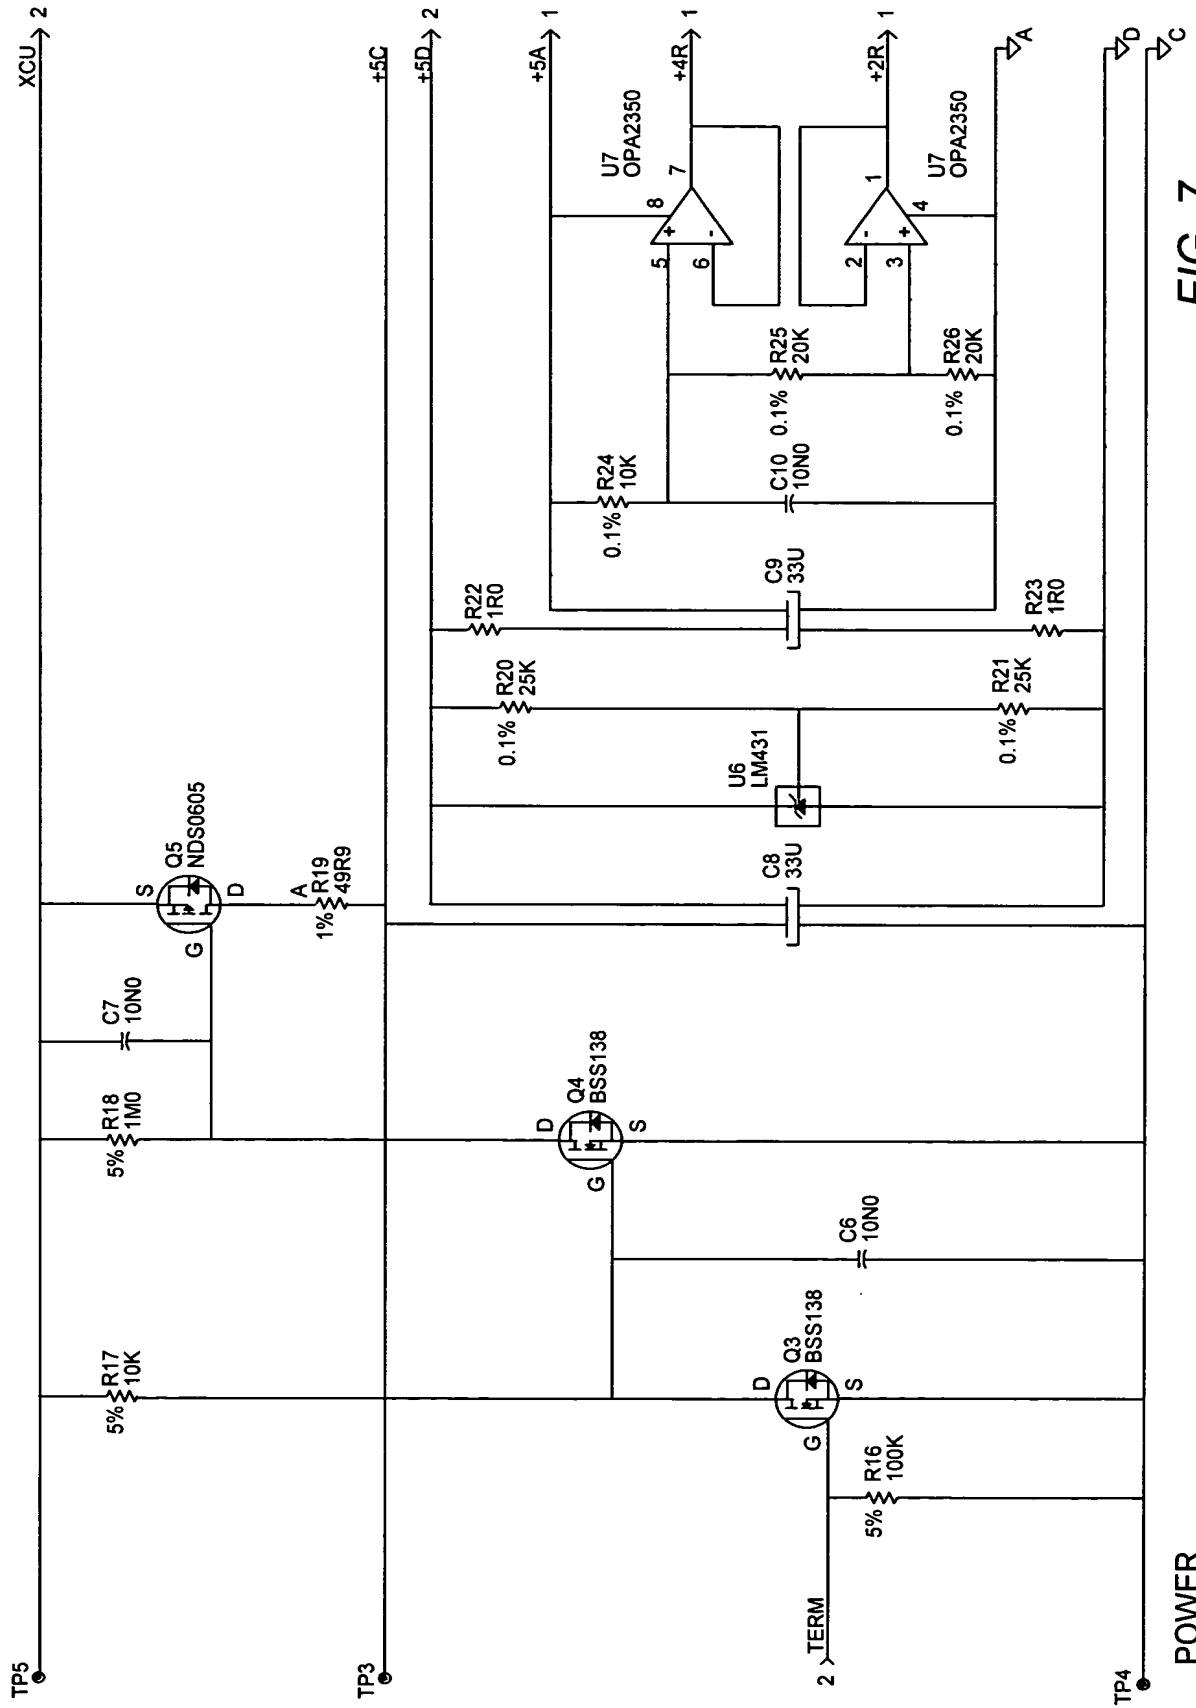


FIG. 7

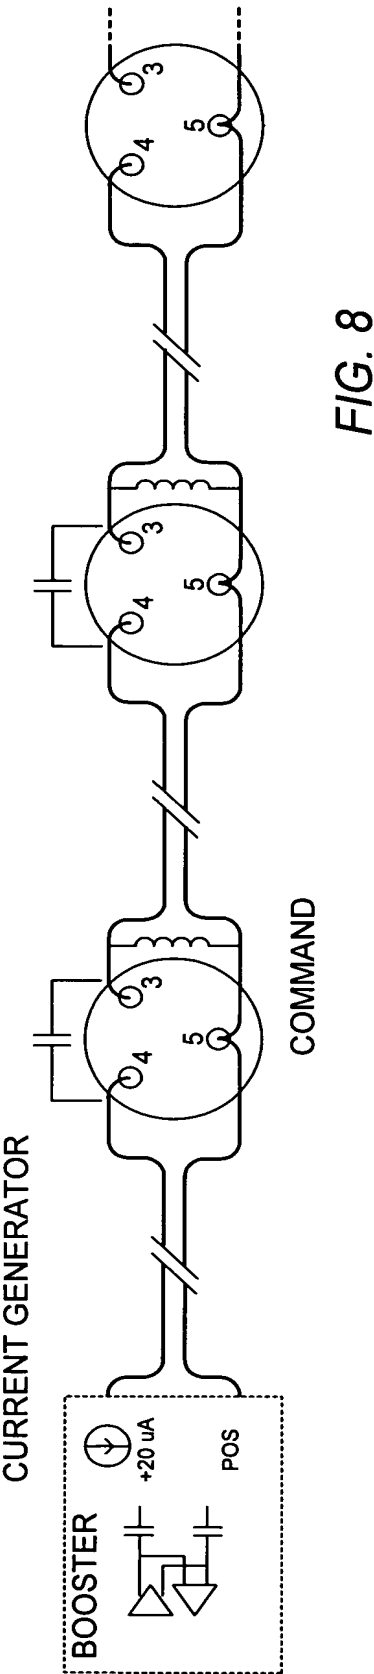


FIG. 8

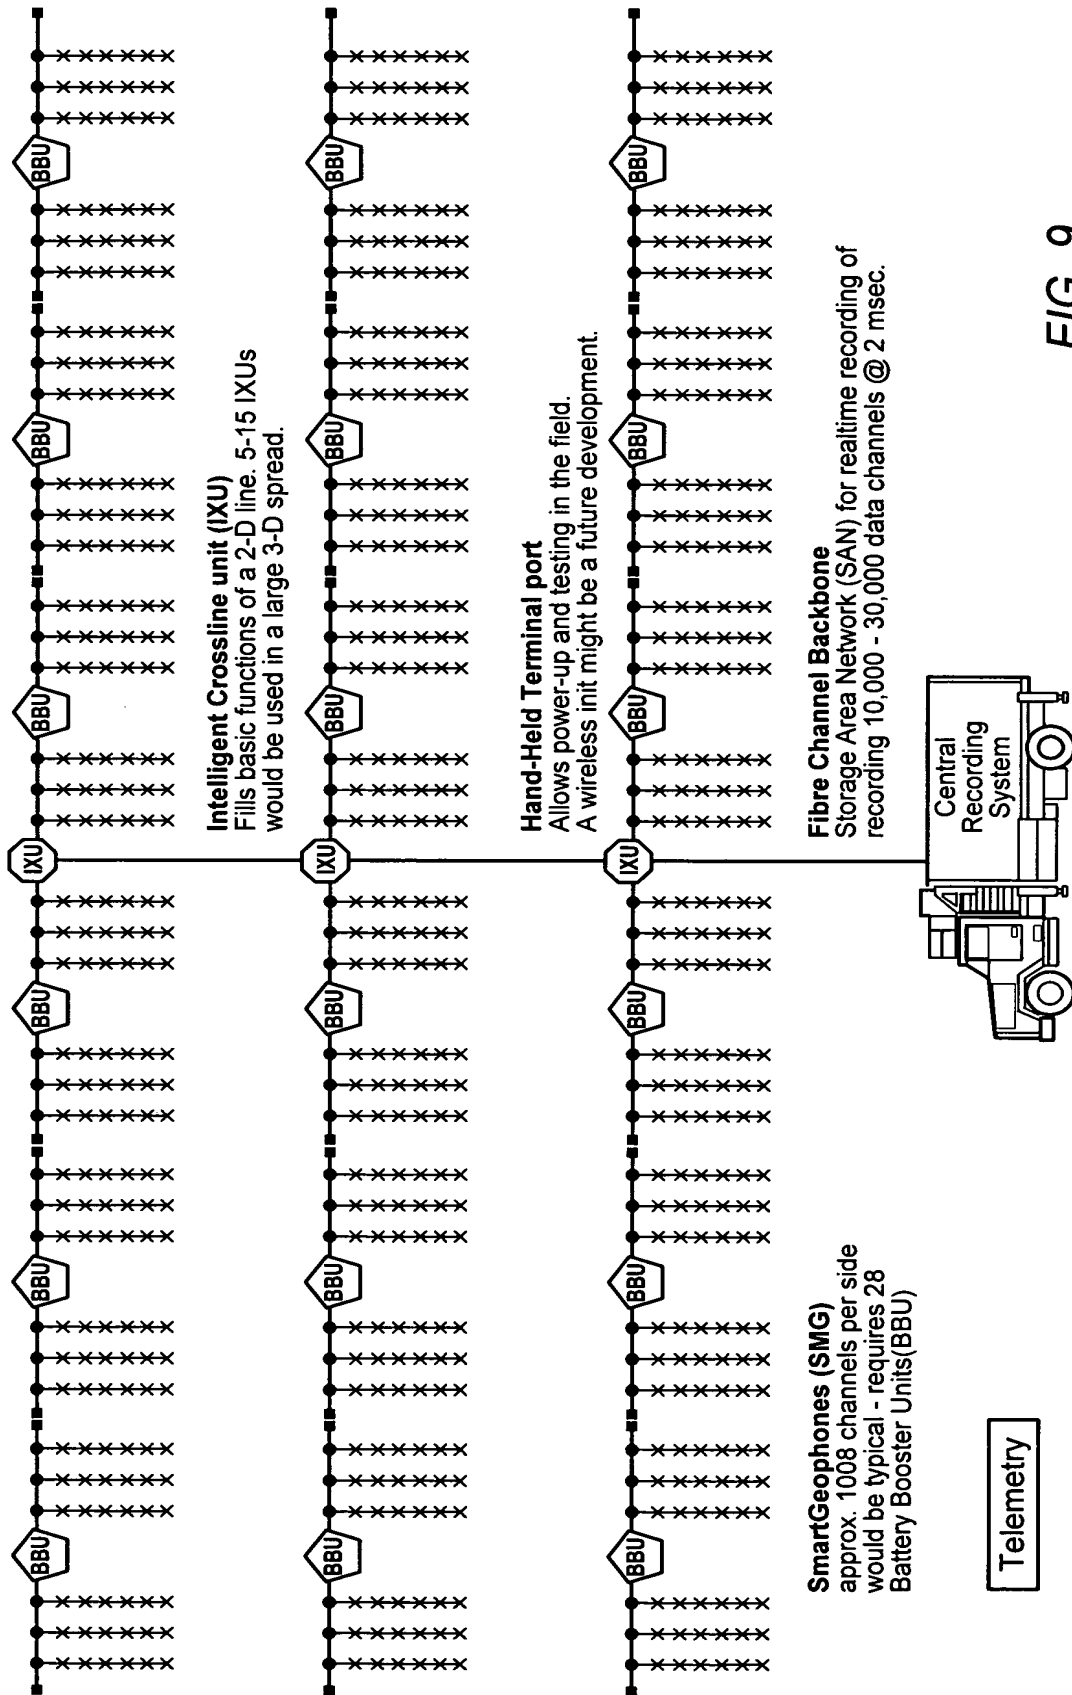


FIG. 9